




Features

- Input Voltage:100-240Vac 47-63HZ
- Operating Temperature:-10°C~+50°C
- Charge Method: Constant Voltage / Constant Current / Floating Charge (CC/CV)
- Efficiency:>87%
- Product Size:120*53*32mm
- Warranty:3 years
- Case Material:PC UL94VO
- Input Material:"Red" charge, "green" full
- N.W:0.3kg
- Package Type:Cartons 20*9.5*5cm
- Package Size:50pcs (47.5*41.5*28cm)
- Delivery Time:2-5working days
- Product standards: CE/ROHS/SAA

Input Plug

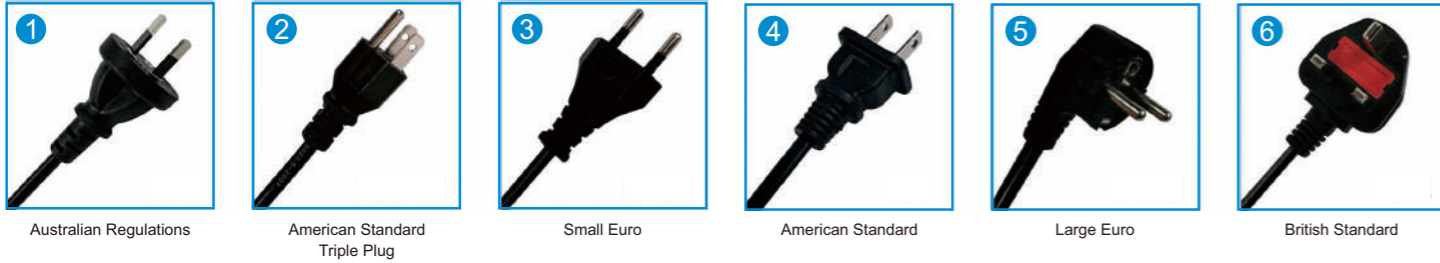

Australian Regulations American Standard Triple Plug Small Euro American Standard Large Euro British Standard

Output Plug



RCA Plug 5.5*2.5 5.5*2.1 C13 Plug XLR Plug 50A Anderson 45mm 73mm




GX12 GX16-4 GX16-3 GX16-2 GX16-3 XT30 XT60 XT90

Specifications

Item No	Battery Voltage	Series	Charge Voltage	Charge Current
7.4V	7.4V Ternary Lithium Battery	2S	8.4V	5A
12V	12V Ternary Lithium Battery	3S	12.6V	4.5A
12V	12V Lead Acid Battery	1S	14.5V	4A
12V	14.8V Ternary Lithium Battery	4S	14.6V	4A
15V	14.8V Ternary Lithium Battery	4S	14.6V	4A
22.2V	22.2V Lead Acid Battery	5S	25.2V	2A
24V	24V Lead Acid Battery	2S	29V	2A
24V	24V Lifepo4Lithium Battery	8S	29.2V	2A
24V	24V Ternary Lithium Battery	7S	29.4V	2A
30V	29.6V(30V) Ternary Lithium Battery	8S	33.6V	1.8A
36V	36V Ternary Lithium Battery	10S	42V	1.5A
36V	36V Lead Acid Battery	3S	43.5V	1.5A
44.4V	44.4V Ternary Lithium Battery	12S	50.4V	1.2A
48V	48V Ternary Lithium Battery	13S	54.6V	1.2A
48V	51.8V Ternary Lithium Battery	14S	58.8V	1A
48V	48V Lead Acid Battery	4S	58V	1A
55.5V	55.5V Ternary Lithium Battery	15S	63V	1A
60V	60V Ternary Lithium Battery	16S	67.2V	0.9A
60V	60V(63V) Ternary Lithium Battery	17S	71.4V	0.9A

Adaptation

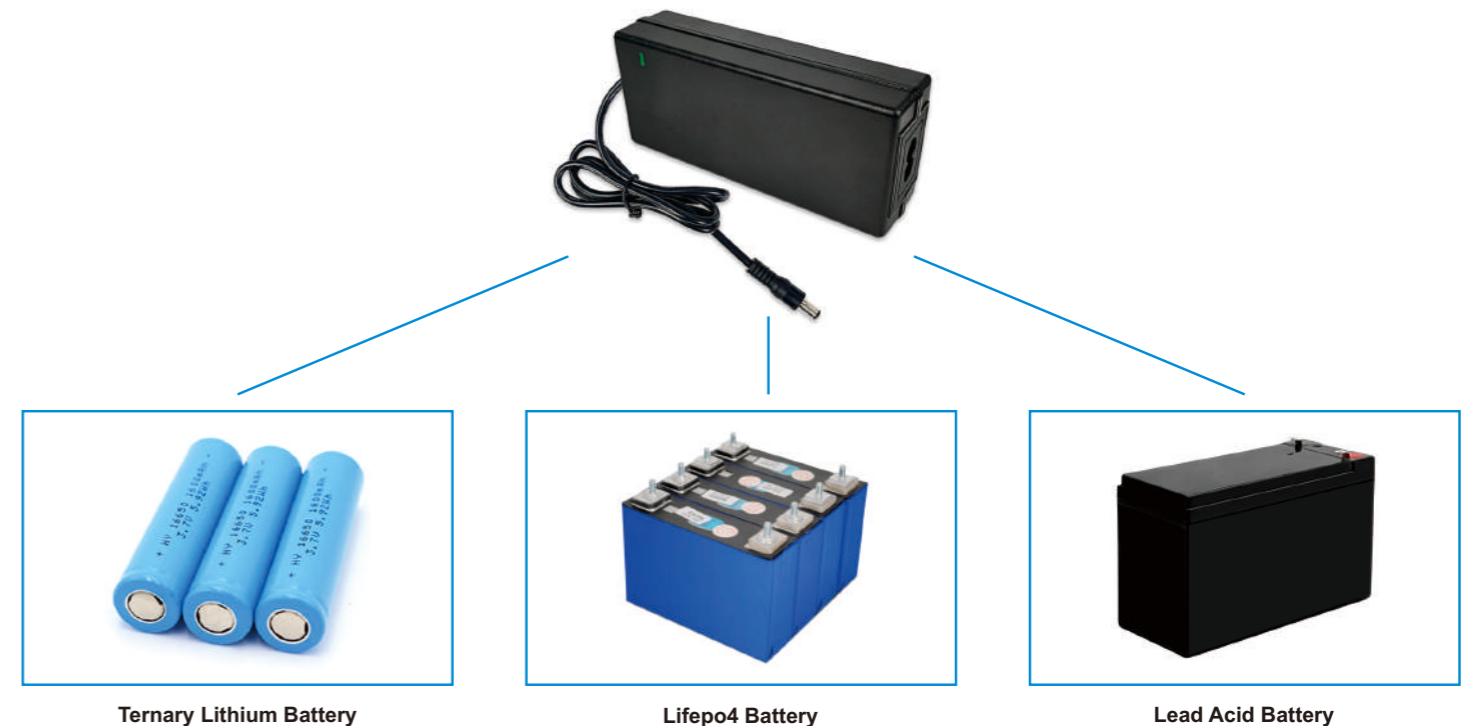

Ternary Lithium Battery

Lifepo4 Battery

Lead Acid Battery