


PRODUCT SPECIFICATION

Model NO.	NG26
Nominal Capacity(AH)	26Ah
Nominal Voltage(V)	3.2V
Standard Charge Current(A)	0.5C
Maximum charge current(A)	1C
Impedance(Ω)	0.2m Ω
Max. discharge current(A)	2C
Max.charge voltage(V)	3.65V
Discharge cut-off voltage(V)	2.5V
Charge working temp.(°C)	0~55°C
Discharge working temp.(°C)	-20~55°C
Cycle life	4000 Cycles



PRODUCT FEATURES

- Extreme light weight
- Extended cycle life
- Low self discharge
- Superior cranking power
- Completely sealed
- Environmental protection
- Broad application
- VDA compliant

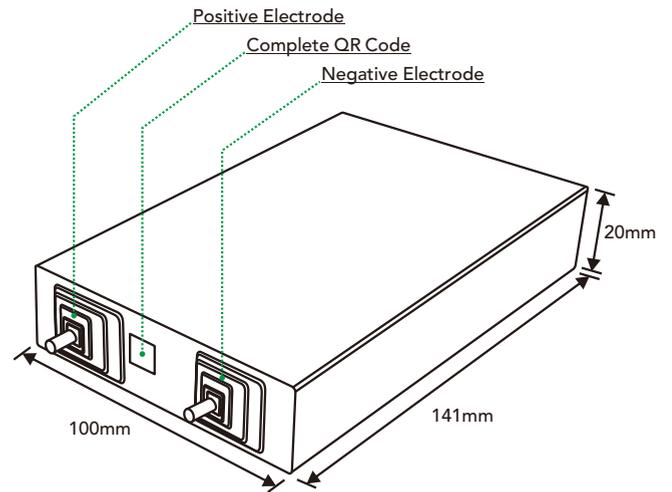

LONG BATTERY LIFE



HIGH CAPACITY
Super long life of about 5 years, large capacity battery life, long-distance riding without worrying about power problems



HIGH-QUALITY
Sufficient capacity and sufficient amount to refuse false bids without fear of wind and rain, cold resistance and high temperature resistance

PRODUCT APPLICATIONS



Energy Storage Systems

Generation-side energy storage | Grid-side energy storage | Power-side energy storage



Passenger Cars

Pure Electric Private Car | Pure Electric Operating Vehicle



Business Applications

Road passenger vehicles | Logistics Delivery Vehicle | Heavy Duty Transport Vehicle
Road cleaning vehicles | Construction Machinery Vehicle | Two-wheeled vehicles
Ships | Special application vehicles