


High Frequency On Grid Solar Inverter

NX5000TM Series (4KW-15KW)




Features

- Wide input voltage range from 160V-1000Vdc
- IP65 protection degree
- Integrated DC switch
- DSP controller
- The maximum efficiency is 98.4%
- Multi MPPT controller
- WIFI monitoring standard
- Easy installation


Introduction

NX5000TM series PV inverters take full account of the needs of end customers, It is used to convert the DC generated by photovoltaic panels into AC and send it to the grid in a three-phase manner.with excellent performance at the same time, use LED as inverter status display, effectively improve product life.
Using DSP digital control,could afford wide grid voltage range, have a full range of protection features; to maximize the benefits at the same time, greatly enhance the reliability of the product.


Back panel printing description

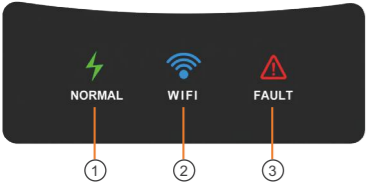

1. Operation normal (Green)
2. WIFI communication (Blue)
3. Error display (Red)
4. PV input
5. DC switch
6. WIFI connector
7. USB
8. RS485
9. AC output
10. Meter

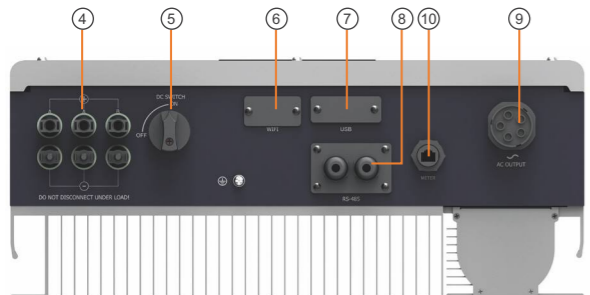

Solar system connection

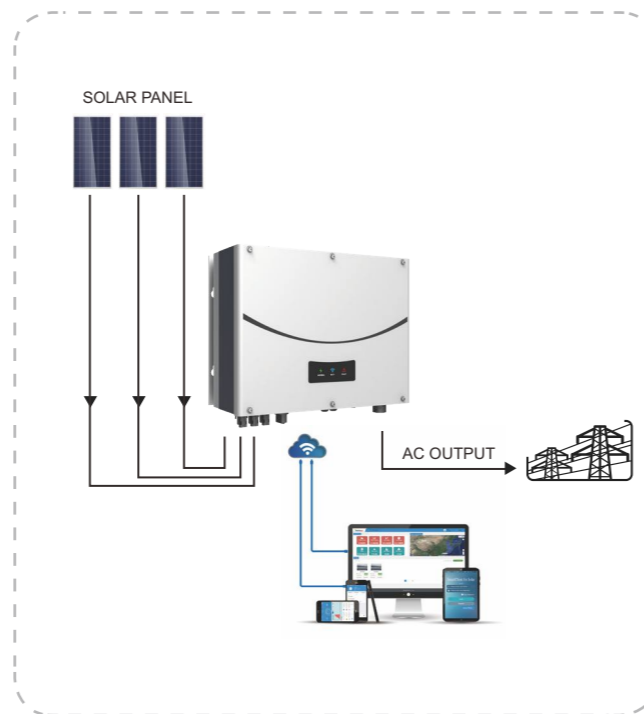

Specification --- 4-6KW

MODEL		NX50-4000TM	NX50-5000TM	NX50-6000TM
OUTPUT (AC)	Rated AC output power	4000W	5000W	6000W
	Max.AC apparent power	4400VA	5500VA	6600VA
	Max.output current	6.4A	8A	9.6A
	Nominal AC Voltage	230V \ 400V		
	AC Voltage range	320-478V		
	AC grid frequency range	50±5Hz		
		60±5Hz		
	Power factor at Rated power	1		
	Adjustable displacement power factor	0.8leading...0.8lagging		
	THDi @ Full load & THDI <1%	< 3%		
AC grid connection type	3W+N+PE			
INPUT DATA	Max.recommended PV power	4800W	6000W	7200W
	Max.DC voltage	1000V		
	Start voltage	160V		
	Nominal voltage	600V		
	MPPT voltage range	200V-1000V		
	Max.input current	12.5A \ 12.5A		
	Number of independent MPP trackers / strings per MPP tracker	2\1		
	DC connection	H4 \ MC4		
EFFICIENCY	Max.efficiency	98.4%		
	Euro weighted efficiency	97.6%		
	MPPT efficiency	99.5%		
Protection devices	DC reverse polarity protection , Output over current protection, Output overvoltage protection-varistor, Integrated DC switch, Ground fault monitoring, Integrated all-pole sensitive leakage current monitoring unit			
GENERAL DATA FEATURES	Dimension(W/H/D)(mm)	500*428*200		
	Weight (kg)	21		
	Operation temperature range	-25°C - +60°C with derating above 45°C		
	Noise emission(typical)	≤35dB(A)		
	Altitude	3000m		
	Self-consumption (night)	< 1W		
	Topology	Transformerless		
	Cooling concept	Natural		
	Environmental protection Rating	Ip65		
	Relative humidity	0-100%		
FEATURES	AC connection	Connector		
	Display	LED		
	Interfaces:USB/WI-FI/RS485/GPRS	Yes\Yes\Yes\Opt		
	Warranty	Standard 5 years \ 10 years (opt.)		
	Certificates and approvals	CE \ IEC62109 \ EN50549-1		