

LTO cylindrical battery

HIGH SAFETY
FAST CHARGE/DISCHARGE
WIDE TEMPERATURE RANGE
LONG SERVICE LIFE



Environmental
Protection



High Energy
Density




Safe And
Stable



Super
Shockproof

Engineering Drawing(mm)

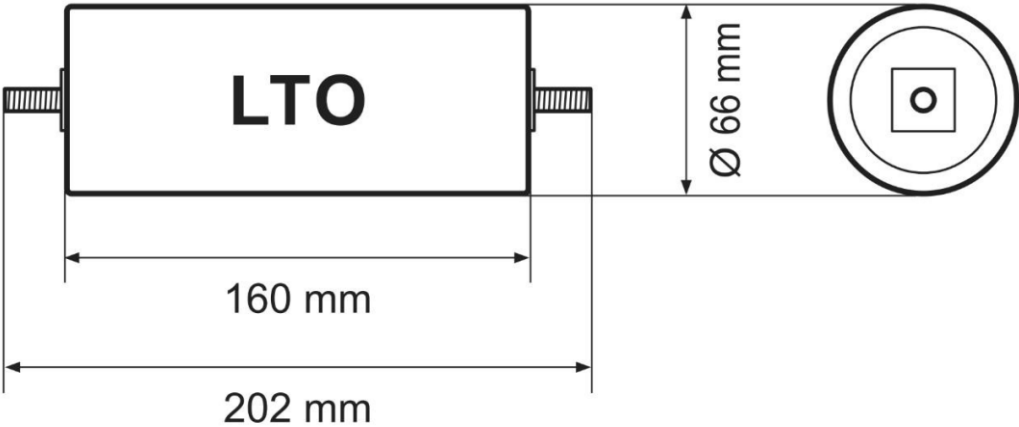

| | | |
|-----------------------------------|-----------------------------------------------------------------------------------|--|
| Model No. | NX-LTO-35Ah | |
| Battery Type | Lithium Titanate Battery (LTO) | |
| Electrical Data | | |
| Nominal Capacity | 35 Ah | |
| Nominal Voltage | 2.3 V | |
| Internal Resistance | ≤ 1mΩ | |
| Max. Charging Current | 10 C (350 A) | |
| Charging Upper Limit Voltage | 2.8 V | |
| Max. Discharge Current | 10 C (350 A) | |
| Discharge Cut-off Voltage | 1.5 V | |
| Cycle Lifetime | 30,000 | |
| Operational Requirements | | |
| Operating Ambient Temperature | -50°C ~ 65°C (Charging) -50°C ~ 65°C (Discharging) | |
| Storage Ambient Temperature | -20°C ~ 45°C Short-term (within 1 month) -20°C ~ 20°C Long-term (within 1 year) | |
| Storage Humidity | <70% | |
| Mechanical Data | | |
| Weight | 1.22 kg | |
| Cell Construction Type | Cylindrical | |
| Cell Diameter | 66 mm | |
| Cell Height (excluding terminals) | 160 mm | |
| Cell Height (including terminals) | 202 mm | |
| Shell Material | Aluminum | |



1



Positive Electrode

2



Negative Electrode



1.Safe and reliable

Extremely high number of charge/discharge cycles>**6000** without worrying about the depth of discharge.



2.Battery Protection

Reasonable battery protection can fully extend the battery life.



3.Temperature Control

The battery can be used under -20° to 60° and the battery safety is guaranteed.



4.Real Performance

Free from fear of cold,be stored in low temperature environment



Penetration test in the water

Single cell with charge (follow the remark's method), under the condition of $20^{\circ}\text{C}\pm5^{\circ}\text{C}$, lay it aside for 1 hour, then use cutting machine to cut the cell vertically, the result shows no leakage, fire or explosion etc.



Drilling test

Single cell with charge (follow the remark's method), under the condition of $20^{\circ}\text{C}\pm5^{\circ}\text{C}$, lay it aside for 1 hour, then use electric drill vertically penetrates into the cell, the pin stays in the cell for 1 min, the result shows no leakage, fire or explosion etc.



Cutting test

Single cell with charge (follow the remark's method), under the condition of $20^{\circ}\text{C}\pm5^{\circ}\text{C}$, lay it aside for 1 hour, then use cutting machine to cut the cell vertically, the result shows no leakage, fire or explosion etc.



Burning test

Single cell with charge (follow the remark's method), under the condition of $20^{\circ}\text{C}\pm5^{\circ}\text{C}$, lay it aside for 1 hour, then put the cell into the raging fire, the cell doesn't indicate any inflammation nor explosion within 40mins.

Results show that: Yinlong titanium batteries don't occur fire or explosion after penetration, electric di,cutting and other tests.

